


## FIG. 21 / 21L steel c-clamp

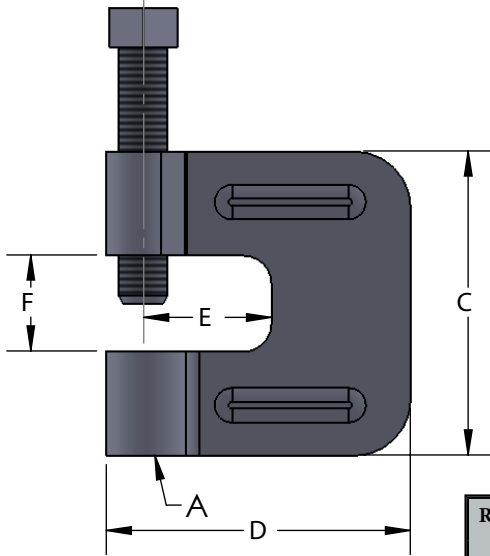

Materials/Finishes:	Plain Carbon Steel (21B)	Electro-Galvanized (21G)
Variants:	Plain Carbon Steel W/ Locknut (21LB)	
	Electro-Galvanized W/ Locknut (21LG)	
	T-304 Stainless Steel W/ Locknut (21LSS)	
	T-316 Stainless Steel W/ Locknut (21LSX)	
Service:	Designed for attaching hanger rod to the bottom flange of a beam. Features the ribbed design for added strength. Hardened steel cup point set screw secures clamp to beam.	
Approvals:	UL - U.L.C. listed 3/8 and 1/2 (1/2 for 4" IPS max) with lock nut only. FM approved for 3/8 only with and without locknut. Complies with Manufacturers' Standard Society SP-58 and MSS SP-69 (Type# 23).	
Ordering:	Specify figure number, finish and rod size.	
Notes:	See MSS SP-69 for proper set screw torque recommendations.	

ROD SIZE A	SET SCREW	C	D	E	F	MAX PIPE SIZE	WGT EACH (lbs)		MAX REC LOAD (lbs)
							21 (W/O NUT)	21L (W/ NUT)	
3/8-16	3/8-16	2-3/8	2-3/8	1	3/4	4	.38	.40	400
1/2-13	3/8-16	2-3/8	2-3/8	1	3/4	4	.38	.40	500
5/8-11	1/2-13	2-3/8	2-5/16	7/8	3/4	5	.56	.60	550
3/4-10	5/8-11	2-3/8	2-5/16	7/8	3/4	6	.60	.68	630
7/8-9	3/4-10	3	3-5/16	1-1/4	1-3/16	8	1.76	1.88	900

PROJECT INFORMATION	APPROVAL STAMP
Project:	Notes:
Address:	
Contractor:	
Engineer:	
Date:	
Approved      Approved as Noted      Not Approved	